
TOWING HOOKS

HOOKS
SAFETY QUICK RELEASE HOOKS

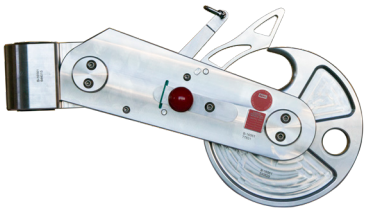


CRI 2,5 / 5 / 10

For towing and hauling operations. Suitable for smaller work boats, rescue boats or other vessels for use in any towing operation up to 10 000 kg bollard pull (BP).

HOOK	CRI

TOWING HOOK

The Henriksen Towing Hook (CRI) is a series of certified on-load quick release towing hooks with higher quality standard, made for safe and effective towing operations. The hooks are on-load released, and can be released locally or remotely.

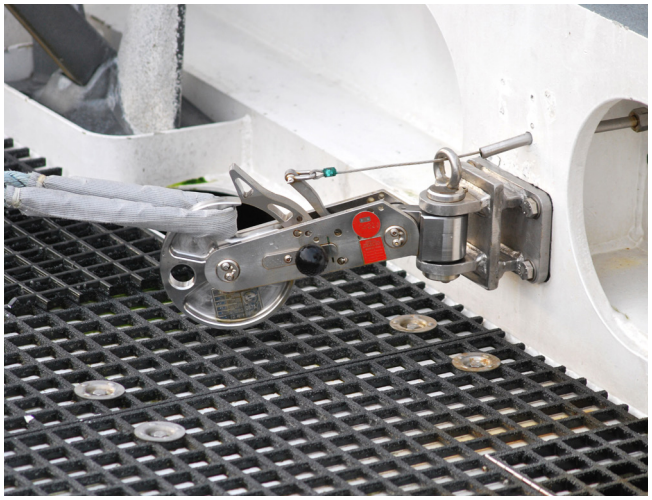


SAFETY FEATURES

- Factory overload tested and certified
- Safety factor 6
- Easy to install
- Easy to use
- Use with rope, wire or steel rings
- On-load release up to full SWL in all working angles
- Little to none maintenance needed
- Re-certified by manufacturer every 5 years

ADAPTERS


The CRI hooks can be delivered with different horizontal or vertical adapters for fastening with screws or welding directly into the boat. Please contact us if you have any questions or specific requirements.

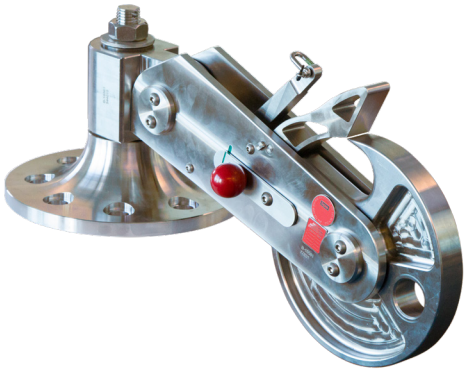


HIGH QUALITY


The CRI hooks are made of only high grade stainless steel, which is the same material that is qualified to be used in Life Saving Appliances according to SOLAS. This makes the CRI hooks almost maintenance free. The CRI can be mounted in the marine environment (salt water proof) without the need of any coatings or protection.
All Henriksen Hooks are delivered in a practical wooden box.

CRI HOOKS

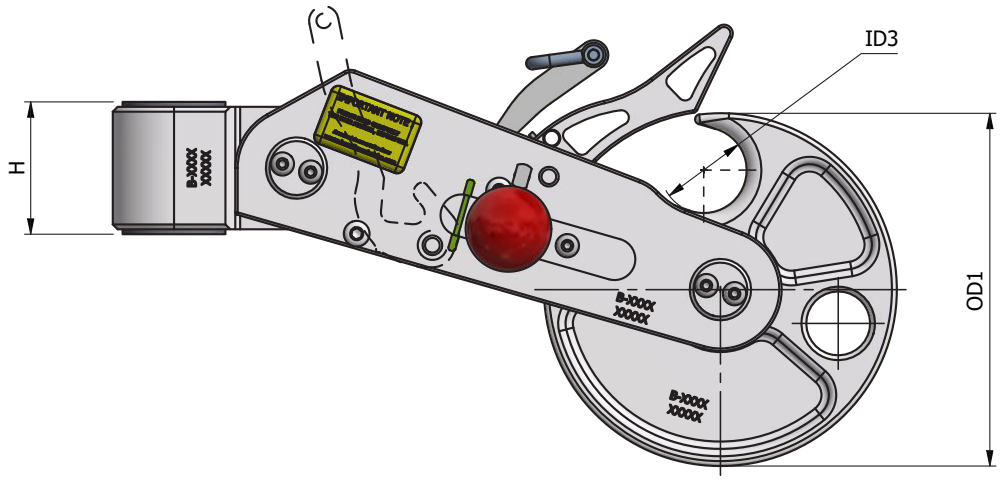

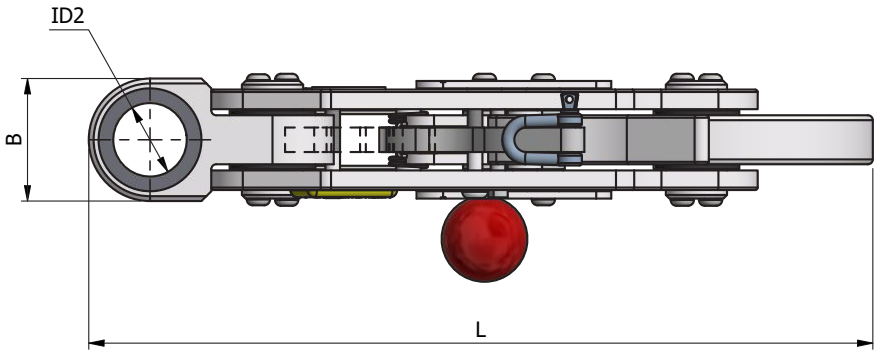

WORKING ANGLES
Vertical: From 0º to 45º
Horizontal: Depends on the installation



HOOK	SWL	L	H	B	OD1	ID2	ID3	WEIGHT
CRI2.5	2 500 kg	320	54	50	Ø144	Ø30	Ø35	4,70 kg
CRI5	5 000 kg	487	94	80	Ø218	Ø40	Ø50	18,0 kg
CRI10	10 000 kg	626	114	100	Ø299	Ø50	Ø70	38,1 kg

Materials	High quality stainless steel
Warranty	5 years (When the re-certification and annual inspection is followed)
Documentation	Certificates, Installation-, Operation-, and Maintenance Manual
Packaging	Wooden case
Optional Accessories	• Certified Adapters

DNV·GL

The HOOKS on this page are all tested and delivered with product certificate and Type Approval Certificate from Det Norske Veritas (DNV) according to DNVGL-ST-0378