

MISES À L'AIR LIBRE POUR RÉSERVOIRS ET BALLASTS




■ Série WIN 5000

Avec sortie latérale

> Vitesse maxi d'entrée d'air : 4 m/s



Homologations

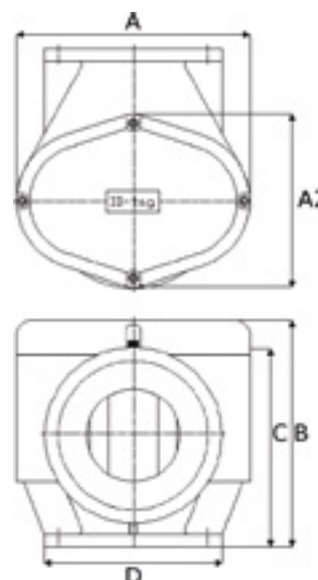

Réf.	Taille	Dimensions (mm)					Poids (kg)
		A	A2	B ± 2,5	C	D	
WSL50A	2"	ø 156	-	240	210	DN50	4,5
WSL65A	2"1/2	ø 156	-	240	210	DN65	5
WSL80A	3"	ø 156	-	240	210	DN80	6
WSL100A	4"	ø 205	-	335	260	DN100	10
WSL125A	5"	ø 205	-	335	260	DN125	12
WSL150B	6"	270	375	365	320	DN150	22
WSL175B	7"	270	375	365	320	DN175	25
WSL200B	8"	270	440	430	375	DN200	30
WSL250B	10"	270	440	436	375	DN250	31
WSL300B	12"	450	610	565	465	DN300	55
WSL350B	14"	450	610	565	465	DN350	57
WSL400B	16"	450	610	565	465	DN400	60



WIN5000 avec résistance chauffante sur demande

