

GUINDEAUX VERTICAUX



Type SMART


- > Guindeau vertical avec ou sans poupée, inox 316L
- > Mixte cordage + chaîne
- > Livré avec relais

i ISO = norme 26011

	A	B	C	D	E	F	G	H	I	L	M
500/700	90	56	130	18/35	11	221	75,5	43	82	175	122
1000/1500	78	118	164	25/50	150	250	90	62	114	217	152

Réf. avec poupée	Réf. sans poupée	Tension (Vcc)	Puissance (W)	Traction continue / arrachement (kg)	Ø chaîne (mm)
SM051208D	SM051208L	12	500	90/650	8 (ISO)
SM052408D	SM052408L	24	500	90/660	8 (ISO)
SM071208D	SM071208L	12	700	100/750	8 (ISO)
SS101208D	SS101208L	12	1000	130/930	8 (ISO)
SS102408D	SS102408L	24	1000	130/940	8 (ISO)
SS101210D	SS101210L	12	1000	130/930	10 (ISO)
SS102410D	SS102410L	24	1000	130/940	10 (ISO)
SS151210D	SS151210L	12	1500	150/1250	10 (ISO)
SS152410D	SS152410L	24	1500	160/1290	10 (ISO)

i Existe en version 48 V.

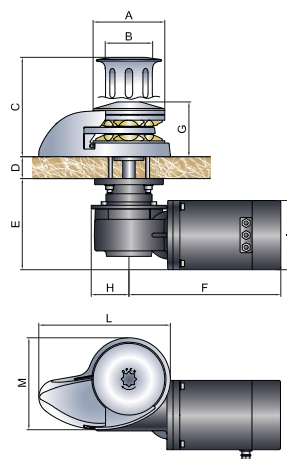

Type ORCHID

- > Guindeau vertical avec ou sans poupée inox
- > Mixte Cordage + chaîne
- > Livré avec relais

	A	B	C	D	E	F	G	H	I	L
1500w	150	102	212	37-62	141	252	107	78	268	188
1700/2000w	150	102	212	37-63	174	330	107	78	268	188
2300w	150	102	212	37-64	190	439	107	100	268	188
2200w AC	150	102	212	37-65	174	350	107	78	268	188

Ref Avec poupée	Ref sans poupée	Tension	Puissance (W)	Traction Continue / arrachement Kg	Chaîne
OR151208D	OR151208L	12V	1500	170/1250	8 (ISO)
OR152408D	OR152408L	24V	1500	180/1290	8 (ISO)
OR171208D	OR171208L	12V	1700	240/1650	8 (ISO)
OR172408D	OR172408L	24V	1700	250/1700	8 (ISO)
OR171210D	OR171210L	12V	1700	240/1650	10 (ISO)
OR172410D	OR172410L	24V	1700	250/1700	10 (ISO)
OR171212D	OR171212L	12V	1700	240/1650	12 (ISO)
OR172412D	OR172412L	24V	1700	250/1700	12 (ISO)
OR202412D	OR202412L	24V	2000	270/1750	12 (ISO)
OR232412D	OR232412L	24V	2300	500/2200	12 (ISO)
OR22AC10D	OR20AC10L	230-400 3PH	2200	730/2550	10 (ISO)
OR22AC12D	OR20AC12L	230-400 3PH	2200	730/2550	12 (ISO)
OR07HY10D	OR07HY10L	HYDRAULIQUE	-	380/380	10 (ISO)
OR07HY12D	OR07HY12L	HYDRAULIQUE	-	380/380	12 (ISO)

