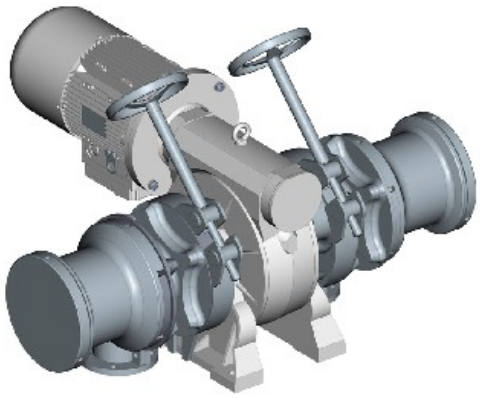


Horizontal axis windlass CW19 5500W 230/400V - chain 17.5mm stud link

Réf : **CW1955AC17TA**

The CW-19 windlass features an oil-lubricated worm gear directly coupled to a three-phase hydraulic or electric motor. The standard version can be fitted with a single sprocket for crimped link chain up to 19 mm. A double sprocket configuration is also available. The gearbox is protected by a paint suitable for the marine environment.

Classic delivery

Public price TTC
26,515.75 €

CARACTERISTICS

HORIZONTAL AXIS WINDLASS CW19 5500W 230/400V - CHAIN 17.5MM STUD LINK

Réf. **CW1955AC17TA**

Dangerous material : non
Weight :
Catalog page : 478

- Standard : stud link
- Hauling speed : 13 m/min
- Lift force : 1500 kg
- Pull-out force : 4800 kg
- Chain diameter : 17.5 mm
- Version : AC

SPECIFICATION

- Standard version supplied with a gypsy for chain up to Ø19 mm
- Windlass body in aluminium
- Oil-lubricated worm gear reducer