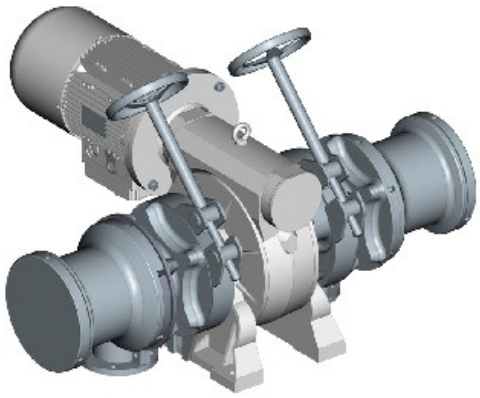


Horizontal axis windlass CW19 Hydraulic motor - chain 20.5mm stud link

Réf : **CW2020HY20TA**

The CW-19 windlass features an oil-lubricated worm gear directly coupled to a three-phase hydraulic or electric motor. The standard version can be fitted with a single sprocket for crimped link chain up to 19 mm. A double sprocket configuration is also available. The gearbox is protected by a paint suitable for the marine environment.

Classic delivery

Public price TTC
30,964.12 €

CARACTERISTICS

HORIZONTAL AXIS WINDLASS CW19 HYDRAULIC MOTOR - CHAIN 20.5MM STUD LINK

Réf. **CW2020HY20TA**

Dangerous material : non
Weight :
Catalog page : 478

- Standard : stud link
- Hauling speed : 12 m/min
- Lift force : 3000 kg
- Pull-out force : 3000 kg
- Chain diameter : 20.5 mm
- Version : Hydraulics

SPECIFICATION

- Standard version supplied with a gypsy for chain up to Ø19 mm
- Windlass body in aluminium
- Oil-lubricated worm gear reducer