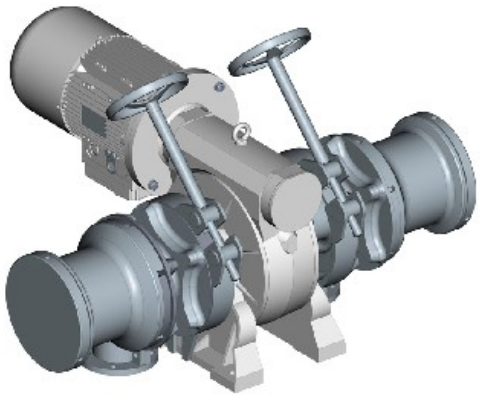


Horizontal axis windlass CW19 7500W 230/400V - chain 20.5mm stud link

Réf : **CW2075AC20TA**

The CW-19 windlass features an oil-lubricated worm gear directly coupled to a three-phase hydraulic or electric motor. The standard version can be fitted with a single sprocket for crimped link chain up to 19 mm. A double sprocket configuration is also available. The gearbox is protected by a paint suitable for the marine environment.

Classic delivery

Public price TTC
31,836.35 €

CARACTERISTICS

HORIZONTAL AXIS WINDLASS CW19 7500W 230/400V - CHAIN 20.5MM STUD LINK

Réf. **CW2075AC20TA**

Dangerous material : non
Weight :
Catalog page : 478

- Standard : stud link
- Hauling speed : 13 m/min
- Lift force : 1600 kg
- Pull-out force : 5900 kg
- Chain diameter : 20.5 mm
- Version : AC

SPECIFICATION

- Standard version supplied with a gypsy for chain up to Ø19 mm
- Windlass body in aluminium
- Oil-lubricated worm gear reducer