
CCX marine battery cable - 3 x 1.5 mm²

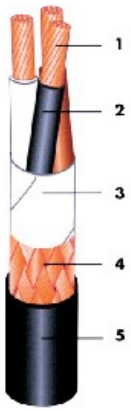

Réf : **CCX31.5**

High performance marine power cable.

Classic delivery

Public price TTC
4.79 €

CARACTERISTICS

CCX MARINE BATTERY CABLE - 3 X 1.5 MM²

Réf. **CCX31.5**

Dangerous material : non
Weight : 0,13 kg.
Catalog page : 284

- Units in box : x 10 m
- External diameter : 9.1 mm
- Admissible current : 23 A
- Weight : 135 kg/km
- Bend radius : 66 mm

SPECIFICATION

Complies with IEC 60228/60092-2/60093-350/60332-3 cat A/60754-1/60754-2/61034

- Approved by many classification societies: ABS, BV, DNV, CGS, GL, Lloyd's, RINA
- Low smoke emission
- Zero halogen

Specifications type MPRX

- Indoor use
- Shielded cable 06/1KV - 250V
- Core: Bare copper stranded, Class 2 IEC 228, Sector for 3 conductors, cross-section = 70 mm².
- Insulation: PR (Polyethylene Retic)
- Internal coating: ribboned
- Armour: bare copper braid
- Outer sheath: polyolefin, colour: black