Mechanical clutch IM1 19 daNm right-hand rotation



Réf : **IM1D**

Clutches are designed to drive hydraulic pumps and more generally to couple two rotating shafts. Clutches can be driven by a pulley or by a face coupling and can be applied to heat engines.

Classic delivery

Public price TTC
642.94 €

CARACTERISTICS

MECHANICAL CLUTCH IM1 19 DANM RIGHT-HAND ROTATION

Réf. **IM1D**

- Torque : 18.5 DaNm
- Displacement : 50 cm³
- Rotation : Right


Dangerous material : non
Weight : 5,00 kg.
Catalog page : 539

SPECIFICATION


Mechanical clutches can only work in one direction of rotation, corresponding to that of the pump.
When coupled with a hydraulic pump, the clutch must be engaged at the minimum engine speed and the distributor must be positioned in neutral.

- Lubrication: For mechanical clutches, we recommend the use of
- For mechanical clutches we recommend the use of oil type EP SAE 90 according to SAE J 306a. The oil should be changed at least once a year.
- The oil must be changed at least once a year.
- Flanges: IM1: supplied as standard for pump unit GR2 and GR3; IM2: to be ordered separately
- Maximum rotation speed: 3000 rpm
- Maximum working temperature: 80 °C
- Clutches supplied without oil


DRAWINGS

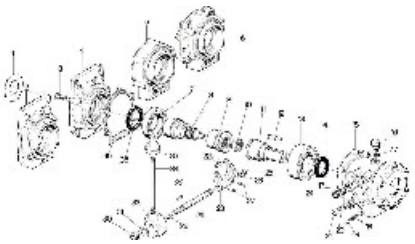

FR_Ouvrir le plan



FR_Ouvrir le plan



FR_Ouvrir le plan