Climma Compact independent air-conditioner



Réf : **CLIMMACOMPACT**

Climma Compact independent air-conditioners are perfect for cooling single or adjacent cabins. All Compact MK3 and EF have been specifically designed for nautic applications, with water cooled condensers, a very compact design, quiet and powerful blowers and an ecologic refrigerant, they are supplied as standard with the reverce cycle option. Available also il cool only option or with electrical heater option.

For multiple installations with two or more units, a pump relay box is available to control a single sea water pump.

Public price TTC

N.C.

Classic delivery

CARACTERISTICS

CLIMMA COMPACT INDEPENDENT AIR-CONDITIONER

Réf. **CLIMMACOMPACT**

Dangerous material : non

Weight :

- Very slim high-efficient heat exchanger
- Powerful and rotatable fan
- Pre-wired electrical box
- Brass threaded condensation outlet pipe and Dry Pan Climma system
- High-efficient condenser

SPECIFICATION

CLIMMA Compact models :

***EH :** electrical heating ; **RC :** reverse cycle (heat pump) **; CO :** cool only.*

		Compact 3.5	Compact 5	Compact 7	Compact 9	Compact 12	Compact 16	Compact 17 S	Compact 24
230/1/50	EH	-	MCN5K3EHU	MC7EFEHU	MCN9K3EHU	MC12EFEHU	MC16EFEHU	MCN17SK3BEHU	MC24SEFEHU
	RC	MC35K3RCU	MCN5K3RCU	MC7EFRCU	MCN9K3RCU	MC12EFRCU	MC16EFRCU	MCN17SK3BRCU	MC24EFRCU
	CO	MC35K3COU	MCN5K3COU	MC7EFCOU	MCN9K3COU	MC12EFCOU	MC16EFCOU	MCN17SK3BRCU	MC24EFCOU
230/1/60	RC	MC35K3RCU	-	MC7EFRCW	-	MC12EFBRCW	MCN16K3RCW	-	MC24SEFRCW
	CO	MC35K3COU	-	MCN7K3BCOW	-	MCN12K3BCOW	MCN16K3COW	-	MC24SEFCOW
115/1/60	RC	MC42K3RCI	-	MCN7K3CRCI	-	MCN12K3BRCI	MCN16K3RCI	-	-
	CO	MC42K3COI	-	-	-	MCN12EFCOI	MCN16K3COI	-	-
400/3/50	CO	-	-	-	-	-	-	-	-


Technical specification :

	Compact 3.5	Compact 5	Compact 7	Compact 9	Compact 12	Compact 16	Compact 17 S	Compact 24


Capacity Cool (Btu/h)	3.500	5.000	7.000	9.000	12.000	16.000	17.000	24.000
Capacity Heat (Btu/h)	3.500	4.500	7.000	9.000	12.000	16.000	17.000	24.000
Net weight (kg)	12	25	26	26	31.5	40	42	45
Shipping weight (kg)	15	30	31	31	36.5	46	48	55
Duct size (mm)	100	100	100	100	125	150	2x100	2x125
Air Flow (mc/h)	230	230	230	230	530	900	600	2x540
Size (WxDxH pour 230/1/50)	381x204x227	520x300x295	425x315x316	520x300x295	523x330x340	605x368x352	800x398x330	800x398x415
Electrical heating for EH models only (W)	N.A.	1300	1300	1300	1600	2000	1300x2	1300x2

Power supply	**Compact 3.5**	**Compact 5**	**Compact 7**	**Compact 9**	**Compact 12**	**Compact 16**	**Compact 17 S**	**Compact 24**
230/1/50	Available	Available	Available	Available	Available	Available	Available	Available
230/1/60	Available	-	Available	-	Available	Available	-	Available
115/1/60	Available	-	Available	-	Available	Available	Available	-
400/3/50	-	-	-	-	-	-	-	-

DRAWINGS

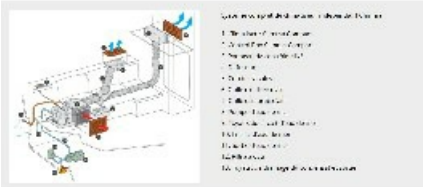

FR_Ouvrir le plan

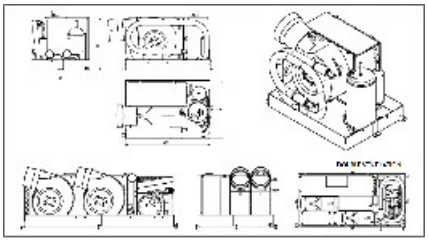

FR_Ouvrir le plan