Climma Split MK3 independant air-conditioner

Réf : **CLIMMASPLIT**



Public price TTC

N.C.

Classic delivery

CARACTERISTICS

CLIMMA SPLIT MK3 INDEPENDANT AIR-CONDITIONER

Réf. **CLIMMASPLIT**

Dangerous material : non

Weight :

SPECIFICATION

MODELS :


		Btu/h	EH	RC
Split 8 MK3	Compresseur	8.000	MSN8K3EHU	MSN8K3RCU
	Evaporateur	8.000	MESA8K3EHU	MESA8K3RCU
Split 12 EF	Compresseur	12.000	MS12EFEHU	MS12EFRCU
	Evaporateur	12.000	MESA12EFEHU	MESA12EFRCU
Split 16 EF	Compresseur	16.000		
	Evaporateur	16.000		
Split 17 MK3	Compresseur	17.000	MSN17SK3EHU	MSN17SK3RCU
	Evaporateur	17.000	MESA17SK3EHU	MESA17SK3RCU
Split 24 MK3	Compresseur	24.000	MSN24SK3EHU	MS24K3RCU
	Evaporateur	24.000	MESA24SK3EHU	MESA24SK3RCU

- **RC = Modèle réversible Chaud - Froid*
- **EH = Modèle avec résistance électrique*

Les modèles Climma Split MK3 :

	SPLIT 8	SPLIT 12	SPLIT 16	SPLIT 17	SPLIT 24
Capacité nominale froid (Btu/h)	8.000	12.000	16.000	17.000	22.000
Capacité nominale chaud (Btu/h)	8.000	12.000	16.000	17.000	22.000
Consommation mode froid (A)	3.40	4.07		6.50	-
Consommation mode chaud (A)	3.40	4.55		-	-
Intensité au démarrage (A)	21.80	23.60		-	-
Poids net (kg)	26/57	32/70	41/90	42/93	49/108
Poids brut (kg)	31/68	37/82	47/104	48/106	55/121
Type de raccordement - Installation	pre-charged pipes with self coupling	3/8 SAE Flare 10 mm	1/2 Flare 12 mm	1/2 Flare 12 mm	1/2 Flare 12 mm
Type de raccordement - Hors installation	pre-charged pipes with self coupling	1/4 SAE Flare 6mm	3/8 Flare 10 mm	3/8 Flare 10 mm	3/8 Flare 10 mm
Diamètre de gaine	100mm / 4in	125mm / 5 in	2x100mm / 4in	2x100mm / 4in	2x152mm / 5in

DRAWINGS

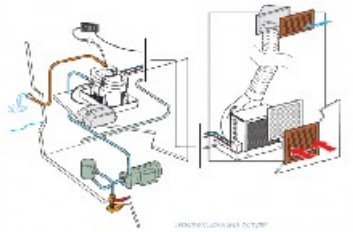

FR_Ouvrir le plan